

RECYCLING

end of life instructions




The **WEEE** symbol affixed to this product indicates it should not be processed with general waste. Join our commitment to a sustainable future by dismantling your **Aperol Bar Top LED Display** and recycling once at 'end of life' - then send the parts to a recycling centre.

DISMANTLING DRAWING

Disassemble

Use a Pozi-Pan head screwdriver and wire cutters to disassemble

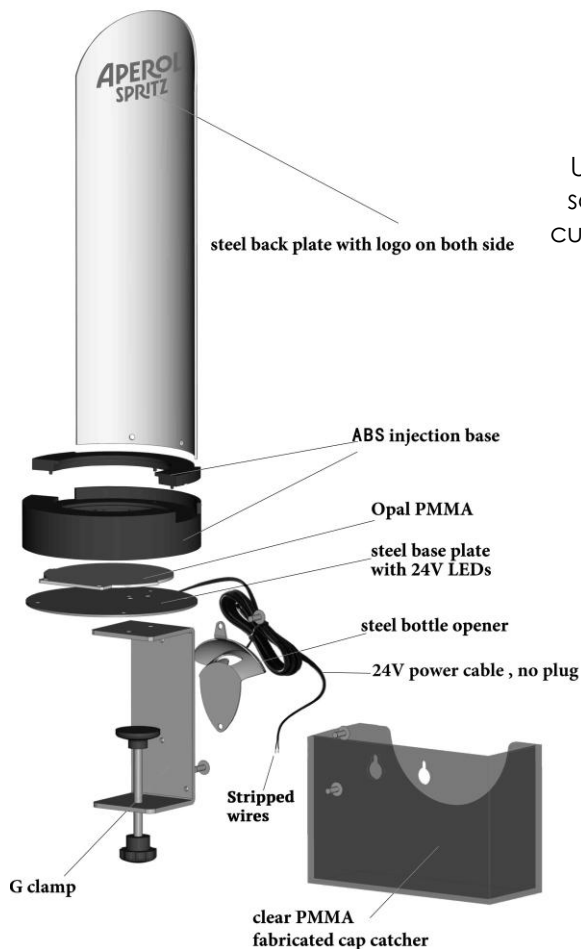

SEPERATING FOR RECYCLING


1. **Metal Recycling Bin** – Steel back and base plate, G-clamp, bottle opener, screws and washers.
2. **WEEE Electronics Recycling Bin** - PCB Board, Switches, LEDs and wires.
3. **Plastic Recycling Bin** - (avoid general waste) ABS, PMMA,
4. **Cardboard Recycling Bin** - All packaging products.

USER MANUAL

Please read this manual thoroughly before use.

NEW PRODUCT

APEROL BAR TOP BOTTLE OPENER LED DISPLAY

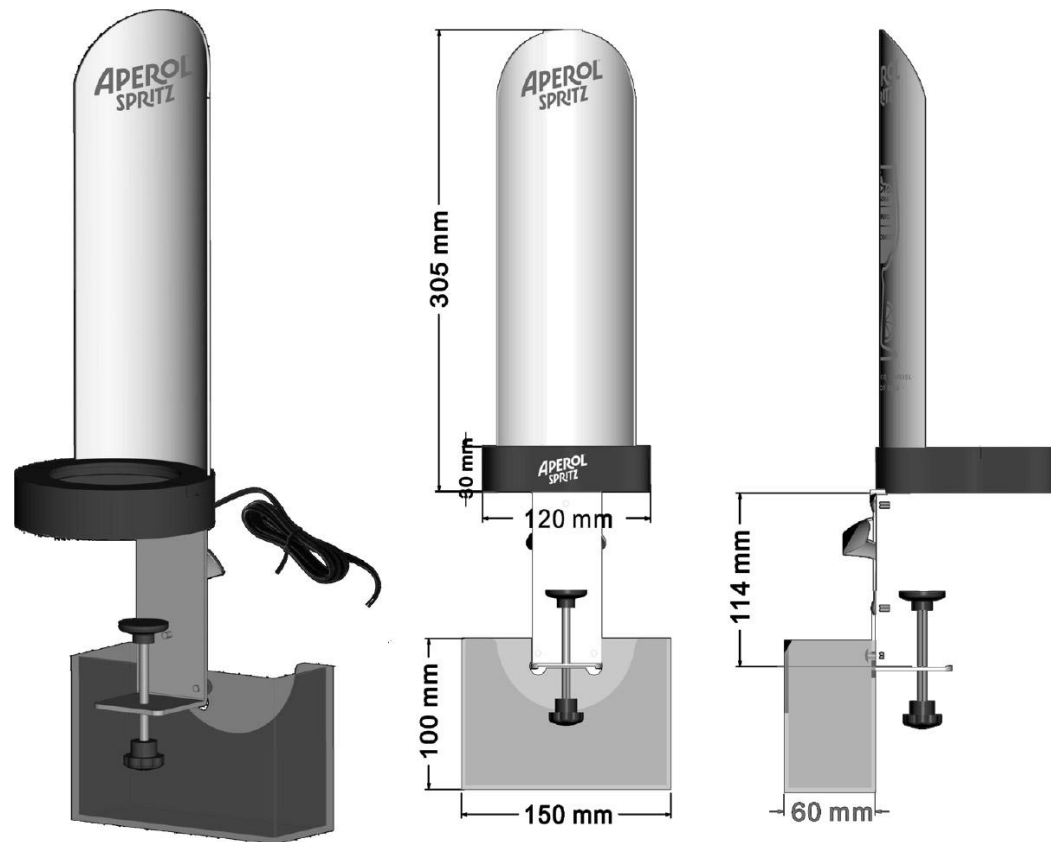

Parts supplied

1. Main unit
2. Bottle Cap Catching Tray
3. Bottle Opener Device
4. Bar Top G-Clamp

APEROL BAR TOP BOTTLE OPENER LED DISPLAY

Important information

ELECTRONICS/COMPLIANCE/RECALL

- PCB with 48pcs x LEDs type 2835.
- Input 24V AC.
- For further info: compliance, recycling or recalls contact hello@illumX.com – title 'The Compliance Manger'

MAINTENANCE

- Wipe with a warm damp cloth, no chemicals.
- Regularly remove, empty and clean the bottle cap catching tray.
- Regularly check wiring for damage.
- If not permanently in use, keep packaging and store your APEROL BAR TOP BOTTLE OPENER LED DISPLAY in a clean and dry environment.

IMPORTANT WARNINGS – READ CAREFULLY

- When installing the wires into the under-counter transformer, it's important to use a qualified electrician.
- Secure the wire to avoid hazards.
- Ensure the product is clamped securely to the Bar Top.
- Do not disassemble, open, drop, crush, puncture, shred and/or replace any of the accessories and/or parts or warranty is invalid.
- Do not use excessive force when inserting/removing connectors.
- This is a fragile item, always handle with care. Any misuse can cause accidents and/or injuries.
- This is not a toy – **keep away from children.**

TROUBLESHOOTING

- ensure the under counter transformer is powered on.
- check for visible damage to connections.
- ask an electrician to check connection to the under-counter transformer.
- if LEDs are flickering, disconnect power, allow to cool and reconnect. If connected under-counter ask electrician to disconnect and reconnect.
- if unit is overheating seek advice of an electrician or refer to recycling section.
- no parts are replaceable, if after checking a) – e) this unit still isn't working please recycle and dispose, do not attempt to fix.

PART 1

Install the Aperol Glass

STEP 1
Place Aperol Glass
inside white/orange plinth



STEP 2
Push plastic top into
the plinth to secure glass




STEP 3
Completed glass
installation




PART 2

Using G-Clamp,
screw to the
Bar Top until
firmly in place

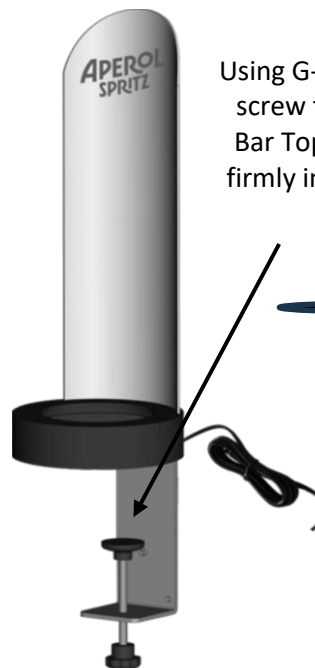

PART 3

Attach Bottle Opener
and Cap Catching Tray
to the back of the unit.

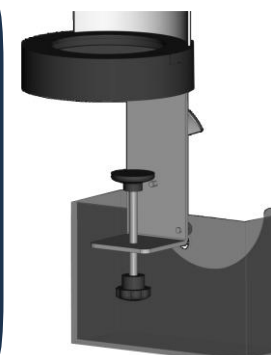

PART 4 – Powering the units

This unit is designed to be powered via the 'under-counter' 24V transformer.

Wires are reverse polarity, therefore can not be inserted the wrong way.

Please consult an electrician before installing the wiring.